

HUNT WITH CONFIDENCE

FAST ON



NEW

4-6MM T64 FMJ™



- Straightened to the highest industry specifications and is coaxially aligned to ± 3 milliradians to produce the most precise hunting arrow available today.
- Built-in FOC front taper adds up to 30% more FOC.
- Available in two deflection factor sizes that cover the full range of arrow spines from 400 through 300 and shaft lengths from 26" to 32"
- RPS Inserts with 8-32 point and broadhead compatibility



INCLUDED



4MM (G) Deep Six™ Nock
(6 grains)



T64 RPS Insert
(18 grains)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)

NEW FOR 2020

4MM AC PROCOMP™



- Four sizes configured for hunting
(Includes nocks and 8-32 aluminum half-outs)
- 4MM ultra-micro diameter aluminum core with carbon overlay
- Straightness ±.0015"



INCLUDED



4MM (G) Deep Six™ Nock
(6 grains)



Aluminum Half-Out
(35 grains)
Uses 8-32 thread 5/16" field points

SOLD SEPARATELY



Titanium Half-Out
(55 grains)
Uses 8-32 thread 5/16" field points



4MM (G) Deep Six™ Steel HIT Insert
(20 grains)



8-32 Multi Point
(75, 85, 100, & 125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	8-32 FIELD POINT
	GPI AVG.	Deflection in Inches	Inches	100/125 Grains
7.4	13.3	DF 7.9	32	5/16
9.5	12.2	DF 9.5	30	5/16



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	SHAFT O.D.	STOCK LENGTH
	GPI	Deflection in Inches	Inches	Inches
380	8.3	0.380	0.227	32.63
340	8.9	0.340	0.221	33.63
300	9.5	0.300	0.236	33.63
250	10.8	0.250	0.245	34.00



4MM CARBON INJEXION™



- 4MM ultra-micro diameter carbon fiber construction
- Pre-installed 4MM (G) Deep Six nocks
- 4MM (G) Deep Six™ threaded HIT steel inserts
- Straightness: ±.003"



INCLUDED For use with Deep Six™ broadheads & field points



4MM (G) Deep Six™ Steel HIT Insert
(20 grains)



4MM (G) Deep Six™ Nock
(6 grains)

SOLD SEPARATELY



Deep Six™ Steel Field Points
(100-125 grains)



Half-Outs
Titanium (55 grains), Aluminum (35 grains)
Uses 8-32 thread 5/16" field points



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	100/125 grains	Inches
480	8.3	0.480	31.25	DP6-4	0.231
400	8.9	0.400	31.75	DP6-5	0.236
330	10.2	0.330	32.25	DP6-5	0.244
280	11.2	0.280	32.5	DP6-6	0.252

4MM FULL METAL JACKET™



- 4MM ultra-micro diameter carbon core with 7075 alloy metal jacket
- Pre-installed 4MM (G) Deep Six™ nocks
- 4MM Deep Six™ thread steel HIT inserts
- Easy target pull
- Straightness ±.002"



INCLUDED For use with Deep Six™ broadheads & field points



4MM (G) Deep Six™ Steel HIT Insert
(20 grains)




4MM (G) Deep Six™ Nock
(6 grains)

SOLD SEPARATELY



Deep Six™ Steel Field Points
(100-125 grains)



8-32 Multi Point
(75, 85, 100, & 125 grains)



Half-Outs
Titanium (55 grains), Aluminum (35 grains)
Uses 8-32 thread 5/16" field points

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	100/125 Grains	Inches
460	9.0	0.460	31	DP6-4	0.228
400	9.8	0.400	31.5	DP6-4	0.234
330	11.0	0.330	32	DP6-5	0.240
280	12.0	0.280	32.5	DP6-6	0.243





MORE PASS-THROUGHS
QUICKER KILLS

THE 5MM MICRO DIAMETER FMJ MINIMIZES FRICTION FOR
DEEPER PENETRATION AND FLIES WITH LESS DRAG FOR
HIGHER VELOCITY AT IMPACT AND LESS WIND DRIFTING.

5MM FULL METAL JACKET™



- 5MM micro-diameter carbon core with 7075 metal jacket
- Pre-installed 5MM (X) nocks
- 5MM (X) HIT 8-32 inserts included
- Easy target pull
- Straightness $\pm .002$
- Also available in Dangerous Game ($\pm .002$ ") & Match Grade, ($\pm .001$ ")
- New 250 size



INCLUDED



5MM (X) HIT® Insert
(16 grains)



5MM (X) Nock™
(9 grains)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)



8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110 & 125 grains)



Deep Six™ Steel Field Point
(100-125 grains)



5MM (X) Deep Six™
Steel RPS Insert
(25 grains)



5MM Brass Hit™ Break-
Off 8-32 Insert
(Adjustable to 75-50 grains)

NEW



5MM Aluminum 8-32 Half-out
(25 grains)

NEW



5MM Steel 8-32 Half-out
(75 grains)

FMJ Match Grade available only through storefront full-service,
authorized Easton retailers (Sizes 300, 340, 400 & 500)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.	HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches	
500	9.1	0.500	31	17/64	BAR3	0.256	#1
400	10.2	0.400	31.5	17/64	BAR3	0.263	#2
340	11.3	0.340	32	9/32	BAR5	0.269	#2
300	12.0	0.300	32.5	9/32	BAR5	0.273	#2
250	11.5	0.250	33	17/64	BAR6	0.273	#2
250*	17.7	0.250	32.5	5/16	BAR7	0.290	NA

* Dangerous Game



5MM AXIS™



- 5MM micro-diameter carbon-composite fibers
- Pre-installed 5MM (X) nocks
- 5MM (X) HIT 8-32 inserts included
- Straightness $\pm .003$ "


• Also available in Match Grade & AXIS Sport
Straightness – AXIS Sport $\pm .006$ " Match Grade $\pm .001$ "



AXIS Match Grade available only through storefront full-service, authorized Easton retailers

INCLUDED


5MM (X) HIT® Insert
(16 grains)


5MM (X) Nock™
(9 grains)

 **NEW**
5MM Aluminum 8-32 Half-out
Included with AXIS SPT only
(25 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.	HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches	
700	6.1	0.700	31.5	17/64	BAR3	0.245	#1
600	7.2	0.600	30.5	17/64	BAR3	0.253	#1
500	8.1	0.500	31	17/64	BAR3	0.258	#1
400	9.0	0.400	31.5	17/64	BAR4	0.264	#2
340	9.5	0.340	32	9/32	BAR5	0.267	#2
300	10.7	0.300	32.5	9/32	BAR6	0.275	#2
260	11.5	0.260	34*	9/32	BAR6	0.280	#2

SOLD SEPARATELY


8-32 Multi Point
(75, 85, 100, & 125 grains)


8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110 & 125 grains)


Deep Six™ Steel Field Point
(100-125 grains)


5MM (X) Deep Six™
Steel RPS Insert
(25 grains)


5MM Brass [X] HIT®
Break-Off 8-32 Insert
(Adjustable 75-50 grains)

NEW 
5MM Steel 8-32 Half-out
(75 grains)



**Fletched six-pack arrows are 32" max stock length.
AXIS Match Grade Sizes: 260, 300, 340, 400
AXIS and AXIS SPT Sizes: 700, 600, 500, 400, 340, 300, 260*

5MM AXIS™ TRADITIONAL



- 5MM micro-diameter carbon-composite fibers
- Pre-installed 5MM (X) nocks
- 5MM (X) HIT 8-32 inserts included
- Straightness $\pm .003$ "
- Wood graphic finish



INCLUDED


5MM (X) HIT® Insert
(16 grains)


5MM (X) Nock™
(9 grains)

SOLD SEPARATELY


8-32 Multi Point
(75, 85, 100, & 125 grains)


8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110 & 125 grains)


5MM Brass [X] HIT®
Break-Off 8-32 Insert
(Adjustable 75-50 grains)

NEW 
5MM Aluminum 8-32 Half-out
(25 grains)

NEW 
5MM Steel 8-32 Half-out
(75 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.	HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches	
600	7.9	0.600	32.25	17/64	BAR3	0.253	#1
500	8.9	0.500	32.5	17/64	BAR3	0.261	#1
400	9.8	0.400	32.75	9/32	BAR4	0.267	#2
340	10.3	0.340	33	9/32	BAR5	0.270	#2



6MM FULL METAL JACKET™



- 6MM reduced-diameter carbon core with 7075 alloy metal jacket
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Easy target pull
- Straightness: ±.003"



INCLUDED



6MM (H) ST RPS™ 8-32 Insert
(18 grains)



6MM (H) Nock™
(9 grains)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)



8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)




6MM Brass (H) Break-Off 8-32 Insert
(Adjustable to 75-50 grains)

6MM BLOODLINE™ BLOODLINE FOC™



- 6MM reduced-diameter lightweight high-strength carbon
- 6MM (H) ST RPS 8-32 inserts
- Pre-installed 6MM (H) nocks
- Straightness: ±.003"

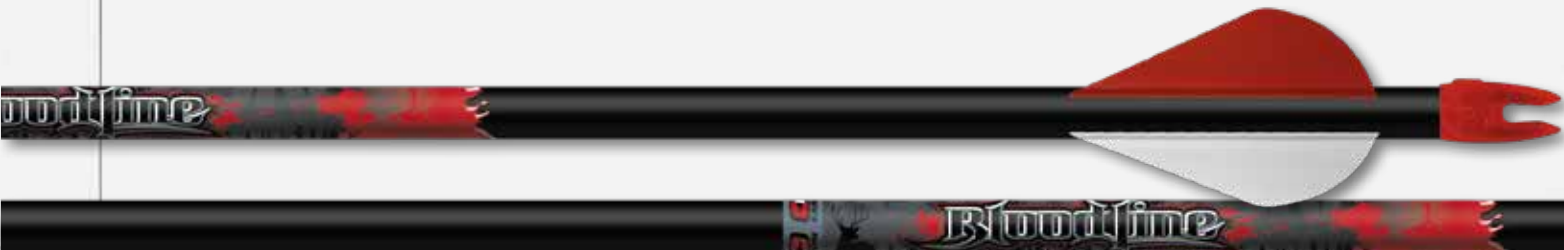

INCLUDED



6MM (H) ST RPS™ 8-32 Insert
(18 grains)



6MM (H) Nock™
(9 grains)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)



8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



HP POINT
(80/100 grains)



6MM Brass (H) Break-Off 8-32 Insert*
(Adjustable to 75-50 grains)



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
470	8.8	0.470	31	9/32	BAR6	0.277
390	9.7	0.390	31.5	9/32	BAR7	0.281
320	10.6	0.320	32	9/32	BAR7	0.287

**Bloodline F.O.C. model comes in sizes: 240, 330, and 400 with brass inserts included.*

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	6.8	0.480	29.5	9/32	BAR7	0.275
400	7.7	0.400	31	9/32	BAR7	0.280
330	8.7	0.330	31.5	9/32	BAR7	0.285
240	9.4	0.240	32	9/32	BAR7	0.287



6MM HEXX™ HEX FOC™




- 6MM reduced-diameter ultra-lightweight high-strength carbon
- Pre-installed 6MM (H) nocks
- MicroLite™ 6MM (H) 8-32 inserts
- Straightness: ± .001



INCLUDED



SOLD SEPARATELY

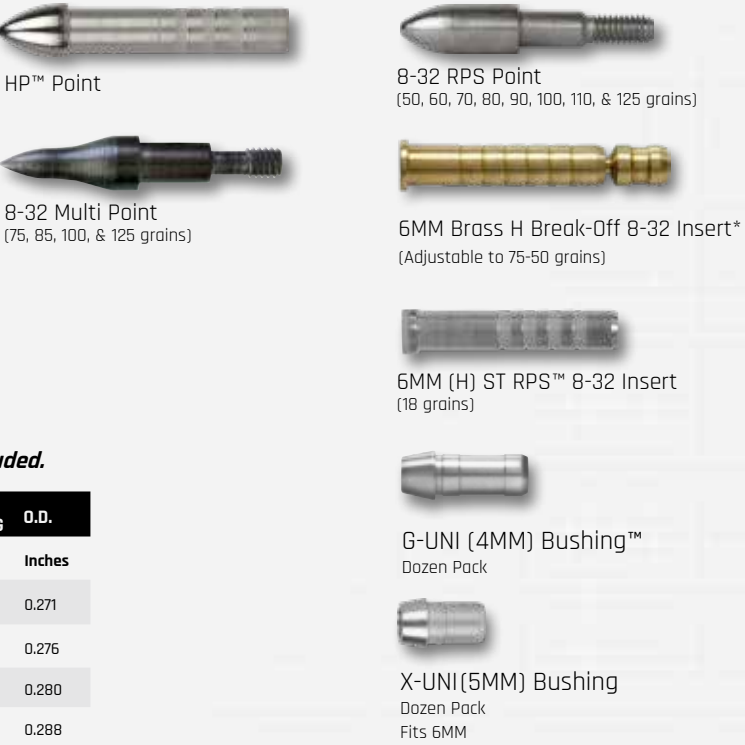


**Hexx F.O.C. comes in sizes: 260, 330, and 400 with brass inserts included.*

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	6.3	0.480	29.5	9/32	BAR5	0.271
400	7.2	0.400	31	9/32	BAR6	0.276
330	7.9	0.330	31.5	9/32	BAR6	0.280
260	9.3	0.260	32	9/32	BAR 7	0.288

6MM AFTERMATH™



- 6MM reduced-diameter high-strength carbon
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Straightness: ±.005"

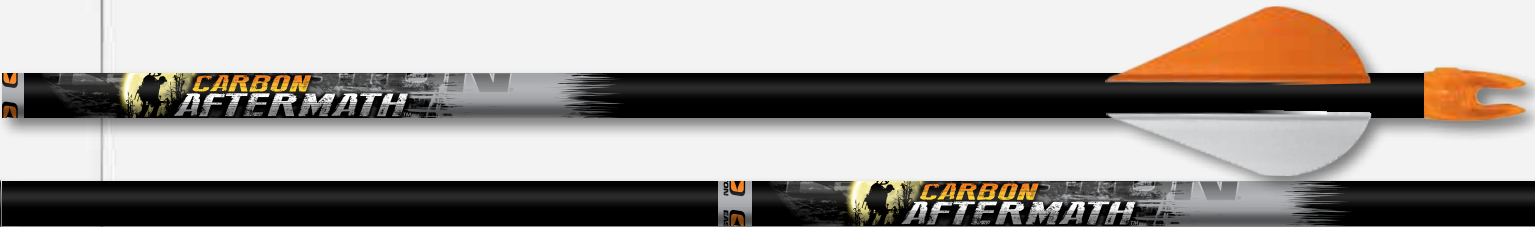

INCLUDED



SOLD SEPARATELY




SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
600	6.4	0.600	30.75	9/32	BAR6	0.269
500	7.3	0.500	30.75	9/32	BAR6	0.276
400	8.8	0.400	31.25	9/32	BAR7	0.283
340	9.6	0.340	31.75	9/32	BAR7	0.287
300	10.2	0.300	32.25	9/32	BAR7	0.291



6.5MM CARBON

EASTON 65

NEW FOR 2020



- High-strength USA-made ACU-CARBON
- Pre-installed Microlite™ nocks
- 6.5 or CB inserts included
- Straightness as noted above



6.5MM MicroLite™ Nock
(8 grains) Included



6.5™ Insert
(23 grains) Included with Classic & Match Grade



CB™ Insert
(21 grains) Included with Bowhunter and Pre-installed in 6.5 RTS


6.5 RTS™ "READY-TO-SHOOT"



26" & 28" Lengths • Pre-installed Nocks & CB Inserts • Size 500

65

MATCH GRADE					HUNTER CLASSIC					BOWHUNTER				
ARROW SIZE	300	340	400	500	ARROW SIZE	300	340	400	500	ARROW SIZE	340	400	500	
WEIGHT (grains/inch)	9.5	9.3	8.4	7.3	WEIGHT (grains/inch)	9.5	9.3	8.4	7.3	WEIGHT (grains/inch)	9.3	8.4	7.3	
RPS POINT (INCH)	5/16	5/16	9/32	9/32	RPS POINT (INCH)	5/16	5/16	9/32	9/32	RPS POINT (INCH)	5/16	9/32	9/32	
STOCK LENGTHS	32	31.5	31	30.5	STOCK LENGTHS	32	31.5	31	30.5	STOCK LENGTHS	31.5	31	30.5	
O.D.	0.300	0.298	0.294	0.287	O.D.	0.300	0.298	0.294	0.287	O.D.	0.298	0.294	0.287	

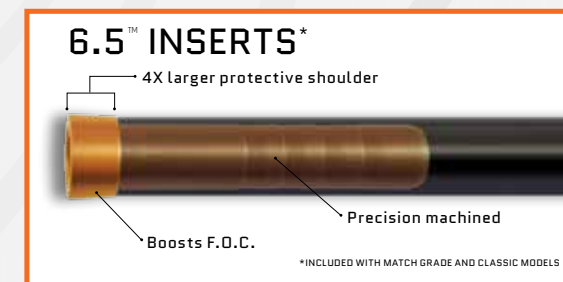

6.5MM HYPERSPEED™ HYPERSPEED PRO™



- 6.5MM standard-diameter high-strength carbon fibers
- Pre-installed 6.5 MM Microlite™ Super Nocks
- CB RPS 8-32 inserts
- Straightness: ±.003" PRO Straightness: ±.001"



Hyperspeed Pro available only through storefront full-service, authorized Easton retailers.

INCLUDED



CB™ (6.5MM) Insert
(21 grains)



MicroLite™ Super Nock® (6.5MM)
(8 grains)

SOLD SEPARATELY



8-32 Multi Point
(85, 100, & 125 grains)



8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



CB POINT
(80/100 grains)


SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI					
		Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
500	6.9	0.500	30.75	9/32	BAR6	0.287
400	7.4	0.400	31.25	9/32	BAR7	0.291
340	8.1	0.340	31.75	9/32	BAR7	0.295
300	8.8	0.300	32.25	9/32	BAR7	0.298



EASTON DEFENDER™ DEFENDER ELITE™



- 6.5MM standard-diameter high-strength carbon fibers
- Pre-installed S Nocks
- CB RPS 8-32 inserts
- Straightness ±.004" Defender Elite ±.002

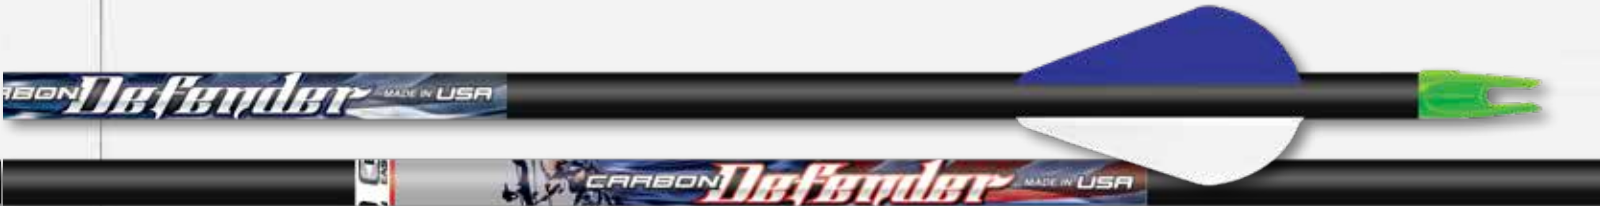

Defender models available only through storefront full-service, authorized Easton retailers.

INCLUDED



CB™ (6.5MM) Insert
(21 grains)



S Nock®
(13 grains)

SOLD SEPARATELY



8-32 Multi Point
(85, 100, & 125 grains)



8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



CB POINT
(80/100 grains)



DEFENDER

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	O.D.
	GPI				
		Deflection in Inches	Inches	O.D. Inches	Inches
500	7.3	0.500	30.5	9/32	0.287
400	8.4	0.400	31	9/32	0.294
340	9.3	0.340	31.5	5/16	0.298
300	9.5	0.300	32	5/16	0.300

DEFENDER ELITE

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	O.D.
	GPI				
		Deflection in Inches	Inches	O.D. Inches	Inches
400	8.4	0.400	31	9/32	0.294
340	9.3	0.340	31.5	5/16	0.298
300	9.5	0.300	32	5/16	0.300

EASTON LEGACY™



- 7075-T9 alloy
- Conventional nocks
- Full-diameter taper neck swage
- RPS inserts included (fletched arrows come with both nocks and inserts included)
- Guaranteed straightness: ±.002"
- Tensile strength (psi): 95,000



INCLUDED



Conventional Nock



RPS™ Insert
(See chart page 55)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)




8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

XX75™ CAMO HUNTER™



- Pre-installed UNI bushings
- Pre-installed Super nocks or X nocks
- RPS inserts included
- Tensile strength (psi): 96,000
- 7075-T9 alloy
- Guaranteed straightness: ±.002"

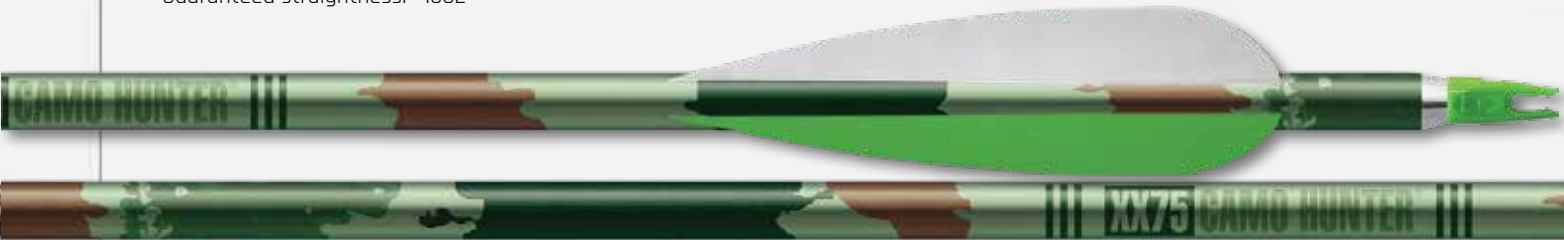

INCLUDED WITH ALL SIZES EXCEPT 1816-1916



RPS Insert
(See chart page 55)



Super Nock®
(13 grains)



Super UNI Bushing®
(See chart page 55)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)



8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

INCLUDED WITH 1816 & 1916 ONLY



5MM (X) Nock™
(9 grains)



X UNI Bushing®
(See chart page 55)



SIZES	1916, 2016, 2018, 2117, 2216, 2219
Strength (PSI)	95,000
Nock System	Conventional



For full specifications, see page 55.

SIZES	1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413
Strength (PSI)	96,000
Nock System	Super UNI and X nock

EASTON GAMEGETTER™



- Pre-installed super nocks
- RPS inserts included
- 7075-T9 alloy
- Straightness: ±.003"
- Tensile strength (psi): 96,000



INCLUDED



RPS™ Insert
(See chart page 55)



Super Nock®
(13 grains)



Super UNI Bushing®
(See chart page 55)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)



8-32 RPS Point
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



SIZES	500, 400, 340, 300
Alloy Strength (PSI)	96,000
Nock System	Super UNI

EASTON BOWFISHING



BUBBA BUDDY™

- High-visibility bright white fiberglass shaft
- AMS Safety Slide® installed
- Chaos® double-barbed steel point
- Tip-release barbs
- Patent-pending heat-treated Cyclone® tip

Cyclone & Chaos AMS Safety Slide are registered trademarks of AMS, LLC



INCLUDED



AMS Chaos® point with Cyclone tip




5/16 Conventional Nock

LENGTH (shaft only)	32 inches
Weight (shaft only)	37.9 grains-per-inch
Total assembled weight	1540 grains

FMJ™ CROSSBOW



- High-strength carbon core with 7075 alloy metal jacket
- Easy target pull
- Straightness: ±.003"
- Factory installed insert and nocks
- Brass bolt inserts available

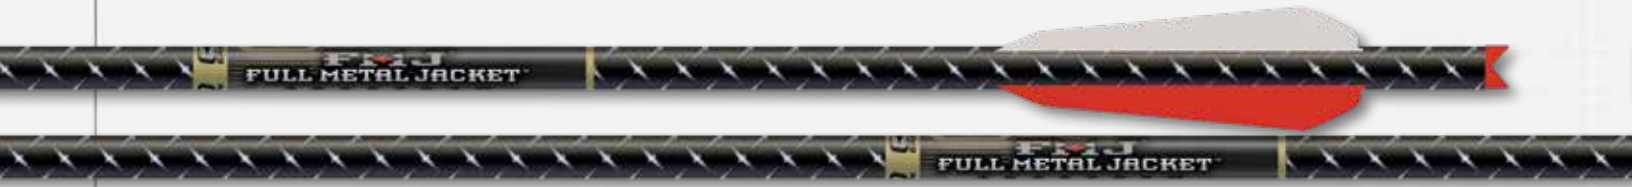

POINTS/INSERTS



FMJ Brass Bolt Insert
(120 Grains)



FMJ Bolt HP Insert
(40 Grains)



11-32 Multi Point
(85, 100, 125 grains)

NOCKS



Flatback Nock
(9 Grains)



Talon™
(12 grains)



Halfmoon Nock
(11 Grains)

LENGTH (inches)	SHAFT WEIGHT (GPI)	VANE WEIGHT	I.D.	O.D.
20	13.7	10 grains	0.287	0.344
22	13.7	10 grains	0.287	0.344



EASTON 9MM™ & BLOODLINE™ CROSSBOW

- High-strength carbon construction
- 20" and 22" lengths

NEW



EASTON 9MM 9MM: Inserts included, nocks sold separately.

LENGTH (inches)	SHAFT WEIGHT (GPI)	VANE WEIGHT	O.D.	I.D.
20	8.9	10 grains	0.344	0.300
22	8.9	10 grains	0.344	0.300



9MM Crossbow Insert
(61 Grains)



INSERTS



Aluminum
(40 Grains)



Brass
(100 Grains)

NOCKS/POINTS



Flatback Nock
(9 Grains)



Talon™
(12 grains)



Halfmoon Nock
(11 Grains)



11-32 Multi Point
(85, 100, 125 grains)

BLOODLINE Factory installed inserts and nocks.

LENGTH (inches)	SHAFT WEIGHT (GPI)	VANE WEIGHT	O.D.	I.D.
20	10.5	10 grains	0.344	0.297
22	10.5	10 grains	0.344	0.297

XX75™ MAGNUM™ CROSSBOW



- Hard-anodized finish
- Inserts & nocks sold separately
- 2219 size
- Factory installed insert and nocks
- 7075-T9 aluminum alloy
- Lengths: 20 and 22 inches
- Tensile strength (psi): 96,000



POINTS/INSERTS



RPS™ Insert



11-32 Multi Point
(85, 100, 125 grains)

NOCKS



Flatback Nock
(9 Grains)



Halfmoon Nock
(11 Grains)



Talon™ Nock
(12 Grains)

LENGTH (inches)	BOLT SIZE	SHAFT WEIGHT (GPI)	VANE WEIGHT	O.D.	I.D.
20	2219	13.8	8 grains	0.344	0.297
22	2219	13.8	8 grains	0.344	0.297



CENTERSHOT™ CARBON



- 6MM reduced-diameter high-strength carbon
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Straightness ±.003



INCLUDED



6MM (H) ST RPS™ 8-32 Insert
(18 grains)



6MM (H) nock™
(9 grains)

SOLD SEPARATELY



75/50 GR. BRASS break-off insert
(sold separately)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
600	7.1	0.600	32.25	9/32	0.273
500	8.3	0.500	32.5	9/32	0.279
400	9.6	0.400	32.75	9/32	0.286
340	10.3	0.340	33	9/32	0.290



WHITEOUT™ CARBON



- High-strength 6.5MM carbon with bright white finish
- CB RPS 8-32 inserts
- Pre-installed S Nocks
- Straightness ±.003"



INCLUDED



CB™ (6.5MM) Insert
(21 grains)



S Nocks®
(13 grains)

SOLD SEPARATELY



8-32 Multi Point
(75, 85, 100, & 125 grains)

WHITEBOX™ CARBON



- Out of the box, ready to shoot. No gluing inserts, cutting, or fletching required.
- 100% Straightness checked
 - 29.5 arrow length (ATA Standard)
 - For bows up to 70 lbs.
 - 420 grain total weight
 - Weight matched
 - Fully assembled with vanes, inserts, nocks, and field points (broadheads sold separately)



INCLUDED AND PRE-INSTALLED



CB™ (6.5MM) Insert
(21 grains)



Super Nock®
(13 grains)



8-32 Multi Point
(75, 85, 100, & 125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
500	7.5	0.500	30.75	9/32	0.291
400	8.1	0.400	31.25	9/32	0.294
340	8.8	0.340	31.75	9/32	0.298
300	9.6	0.300	32.25	9/32	0.301



GRAB, GO, SHOOT.



STABILIZERS

CONTOUR™ HUNTER

Proven Tri-Mod carbon technology to tame vibration while balancing the bow for better aim and shot execution. The go-to choice for both bowhunters and bowhunter limited class competitors, Contour Hunter is the most advanced stabilizer we've ever developed for the modern bowhunter. Available in Black, Realtree® Max 1, and Realtree® XTRA. Weights included.



CONTOUR HUNTER		
Size	8 in-21 cm	11 in-28 cm
Ounces	2.3	2.7
Grams	65	76

BUCKSHOT™ SERIES

The Easton Buckshot series hunting stabilizers provide a powerful advantage for bowhunters. Packed with Easton's vibration-and noise-killing Deadblow™ technology, Buckshot™ features the correct stud length to engage accessories like bow slings and are Easton Quick-Detach system compatible and come in a variety of solid and camo options.

BUCKSHOT XL



- 8-inch Buckshot XL—greatest vibration damping and stabilizer action for longer distance shots or heavier bows. Features two full stages of Deadblow damping system elements • Colors: Black, Realtree XTRA, Coyote Brown

BUCKSHOT STANDARD



- 5.5-inch Buckshot standard provides a lighter mass option for all-around performance. A single-stage Deadblow system provides great feel and high performance • Colors: Black, Realtree XTRA, Coyote Brown

Realtree® XTRA is a trademark of Jordan Outdoor Enterprises, Ltd.

BUCKSHOT MICRO



- 4-inch Buckshot Micro provides Easton's unmatched vibration killing Deadblow technology in a small but powerful unibody package • Colors: Black, Realtree XTRA

Realtree® XTRA is a trademark of Jordan Outdoor Enterprises, Ltd.



BUCKSHOT SERIES			
Size	8 in - 20 cm	5.5 in - 14 cm	4.5 in - 11.5 cm
Ounces	7.1	4.7	4.5
Grams	210	133	128



All Buckshot models feature Easton's Deadblow™ noise-killing technology.

COMPONENTS & MOUNTS

(FOR USE WITH CONTOUR STABILIZERS)

FIXED V-BAR™ WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt—included



ADJUSTABLE V-BAR™ WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt—included



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eye bolt—included



CONTOUR AND Z-FLEX™ V-BAR CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down




QUICK DISCONNECT MOUNT

- Stainless steel
- 7075 alloy
- Precision design
- Zero and 10 degree drop models available



ORIGINAL VARI-WEIGHTS 1/4-20 THREAD

	Ounces	Grams
Module	1.5	43
1/2 Module	0.75	21
Cap	1.5	43

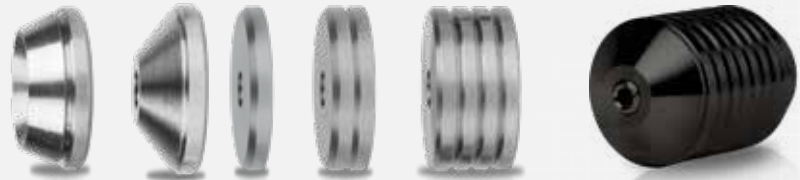

FLAT VARI-WEIGHTS 5/16-24 THREAD

	Ounces	Grams
Contour Base	2.0	57
Z Flex Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114

EZ FLETCH™ FLETCHING TOOL

(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"

(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"

(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"

(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"


VANES, FEATHERS, SPIN WINGS

All weights are within ±0.5 grain

NEW

2" BULLY™ VANES

Ultra-stiff design for high speed stability




Size	Length (in)	Height (in)	Weight (grain)	Colors
200	2.00	.568	6.5	<div><div>● Fire Orange</div><div>● Hot Pink</div><div>● Bright Green</div><div>● Blue</div><div>● Red</div><div>● Yellow</div><div>○ White</div><div>● Indigo</div></div>

NEW

2" BULLY BOAT TAIL™ VANES

Ultra-stiff design for high speed stability • Exclusive Boat Tail shape for superior accuracy




Size	Length (in)	Height (in)	Weight (grain)	Colors
200	2.00	.500	7	<div><div>● Bright Green</div><div>● Yellow</div><div>● Red</div><div>● Fire Orange</div><div>○ White</div></div>

EZ Fletch is a trademark of Arizona Rim Country, Inc.

3" BOAT TAIL™ (BTV) VANES


Ultra-stiff design for high speed stability • Exclusive Boat Tail shape for superior accuracy • Ideal for crossbow



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	<div><div>● Bright Green</div><div>● Yellow</div><div>● Red</div><div>● Fire Orange</div><div>○ White</div><div>● Black</div></div>	Clamshell or 100-count bag

XPV™ VANES

Conventional vanes for broadhead use. Compare to Blazer® vanes.



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.568	6	<div><div>● Fire Orange</div><div>● Hot Pink</div><div>● Bright Green</div><div>● Blue</div><div>● Red</div><div>● Yellow</div><div>○ White</div><div>● Indigo</div></div>	100-count bag 500-count box


DIAMOND VANES®



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175	1.750	.375	3	<div><div>● Bright Green</div><div>● Sunset Gold</div><div>● Yellow</div><div>● Fire Orange</div><div>○ White</div><div>● Black</div><div>● Hot Pink</div></div>	100-count bag
235	2.375	.375	4		
280	2.875	.500	6		
380	3.875	.500	8		


TITE FLIGHT™ VANES

Special rib adds stiffness to cut in-flight flutter and noise



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
175	1.750	.375	3	<div><div>● Hot Pink</div><div>○ White</div><div>● Bright Green</div><div>● Black</div><div>● Fire Orange</div><div>● Yellow</div></div>	100-count bag
200	2.000	.330	4		200-shield cut

FEATHERS



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
3.0 R	3.000	.400	1.3	<div><div>● Yellow FL</div><div>● Chartreuse</div><div>● Red</div><div>● Gray</div><div>● Black</div><div>● Blue</div><div>● Brown</div><div>● Yellow</div><div>○ White</div><div>● Green</div><div>● Orange</div></div>	100-count bag
4.0 R	4.000	.550	2.8		
5.0 R	5.000	.600	4.5		

SPIN WING VANES™

1.75-inch vanes available in right or left • Packaging - 50-count bag



Colors ● Black ○ White ● Blue ● Red ● Yellow

Spin Wing Vane is a trademark of Range-O-Matic Archery Company. Blazer® is a trademark of Bohning Inc.

TOOLS & SUPPLIES

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz.
- HIT approved



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



FASTSET™ VANE GEL

- Sizes: 3 gram



CROSSBOW RAIL LUBE

- Full synthetic formula provides maximum lubrication for crossbow rails
- Protects string from damage



3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner –removes dirt, wax and contaminants from bowstring
- Bowstring Revitalizer–restores color and penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax–protects longer & better than conventional waxes



WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep-sights
- Includes 1m red thread and 1m black thread



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz.



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Available in 10" shop stick



FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



PUCK ARROW PULLER

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage
- Best for tight single spot groups



BROADHEAD WRENCH

- For safe installation and removal of broadheads from arrows



BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



ANGEL MAJESTY™ SERVING

- Two sizes .018 and .021.
- Highest quality serving available
- Greatest dimensional stability
- Extremely long wearing
- Made in Japan
- .018 –100 meters/109 yds. per spool
- .021 –80 meters/87 yds. per spool



BCY™ POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



NEW

ARCHERY OMNI TOOL BY FIX-IT STICKS® - 17 PIECE

- Integrates 17 of the most popular Standard & Metric Hex, and Star bit sizes into the most compact archery tool ever produced
- Snaps together in a T-shape for leverage
- Compatible with any standard 1/4" drive bit
- Breaks down for portability but durable enough for shop use
- Perfect for servicing all types of compound and recurve bows, cam modules, and accessories
- Includes the following bit sizes:
 - Standard Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050"
 - Metric Sizes: 1.5, 2.5, 3.0
 - Star Tip Sizes: T10, T15, T20



PRO HEX FOLD UP SET – STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050

PRO HEX FOLD UP SET – XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64

PRO HEX FOLD UP SET – METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and a 1/8" flat blade screwdriver



PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



PRO HEX LIMB MASTER ALLEN WRENCHES

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes 7/32 and 1/4



ELITE NOCK AND D-LOOP PLIERS

- Maximizes mechanical advantage for tightest possible D-loops
- Patented dual-jaw design
- Convenient and versatile archery tool
- Six tools in one



PRO ARCHERY NEEDLE-NOSE PLIERS


- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation



TOOLS & SUPPLIES

BOW-SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up

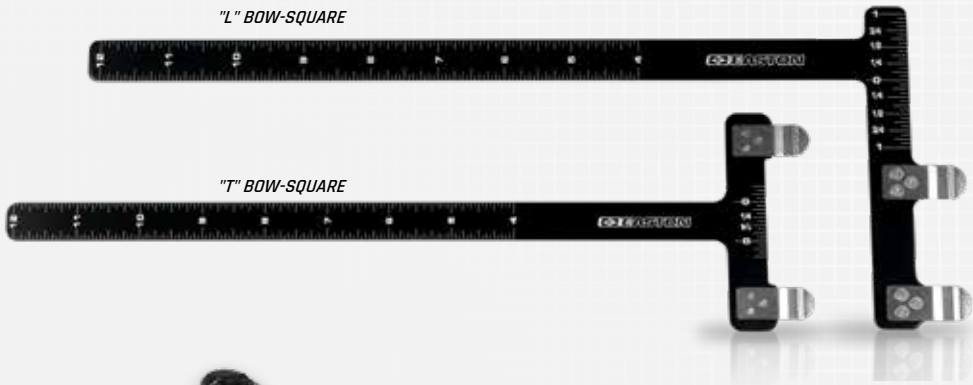

RECURVE BOW STRINGER

- Molded rubber-cupped stringer recommended for stringing target recurve bows
- Makes stringing safe and easy



9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to 27/64" diameters



ARCHERY ESSENTIALS™ TOOL KITS

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12 AND 8 PIECE KITS INCLUDE:

- Extra large folding allen wrench set
- Nock installation & removal tool
- Wedge arrow puller
- Zippered Case Cube
- Bowstring wax
- Serving thread
- D-Loop rope
- Broadhead wrench

6-PIECE CROSSBOW KIT INCLUDES:

- Small folding allen wrench set
- Zippered Cube Case
- Rail lube wax
- Wedge arrow puller
- Broadhead wrench
- Scope lens cleaner cloth

12-PIECE KIT ADDS:

- D-Loop pliers
- Bow-square-L model
- Small folding allen wrench set
- Arrow prep tool kit



6-PIECE CROSSBOW KIT

8-PIECE VALUE PACK

SHOOTING ACCESSORIES

STAY SHARP™ BROADHEAD CASE

- Grippers ensure broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: approximately 5"W x 4"H x 2"D



DELUXE ARM GUARD

- Progressive designs molded from durable poly-carbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: blue, red, yellow, and smoke



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL, and XXL
- Color: black/white




COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: black




DELUXE PARACORD DIAMOND WRIST SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: black, camo, green, pink, blue, red, and orange



STIFF WRIST SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: black, camo, green, pink, blue, red, and orange



NEOPRENE WRIST SLING

- Durable, lightweight neoprene construction
- Easy-adjust strap



COMPETITION QUIVERS

ELITE FIELD QUIVER WITH BELT

- European-inspired luxurious design
- Technical synthetic leather construction
- Infinitely adjustable and sturdy, Elite quiver belt uses secure T-style buckle
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet, customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



ELITE QUIVER BELT

- Sizes: One size fits most
- T-style buckle
- Included with Elite quivers– also sold separately
- Colors: red, blue, grey, carbon black, and white



ELITE RELEASE POUCH



ELITE TAKEDOWN HIP QUIVER* WITH BELT

- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, Elite quiver belt with T-style buckle for secure operation-included
- Allows quiver body tube to separate from belt loop for easy storage
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



*Modular system can accommodate multiple configurations



Accessory Clip (included)



Removable Pocket (included)



Release Pouch (sold separately)

DELUXE FIELD QUIVER WITH BELT

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Adjustable, sturdy Deluxe Quiver belt with T-style buckle included
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch sold separately
- Colors: teal, silver, red, blue, purple, and black
- Left-hand models only available in black and silver



DELUXE QUIVER BELT

- Sizes: One size fits most
- Innovative hook-and-loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH



DELUXE TAKEDOWN HIP QUIVER WITH BELT

- Allows quiver body tube to separate from belt loop for easy storage
- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Adjustable Deluxe Quiver Belt with T-style buckle included
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory-attachment rings
- Colors: teal, silver, red, blue, purple, and black
- Left-hand models only available in black and silver



RECREATIONAL QUIVERS

FLIPSIDE™ 4-TUBE HIP QUIVER WITH BELT

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop upper and lower pockets for wear on right or left side
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



Realtree and Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



Realtree and Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.



REPLACEMENT FLIPSIDE ARROW TUBE



REPLACEMENT BELT CLIP



RANGELITE™ PINK HIP QUIVER

- Lightweight design
- Molded shank and arrow separator
- Easy-access pockets
- Top pocket for releases, pens or smart phones
- Available in right or left hand configurations
- Internal pocket dividers

BOW CASES

DELUXE 3915 & 3615 COMPOUND/RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Available in two sizes (36"Lx15"Wx9"H) and (39"Lx15"Wx9"H)
- Compatible with the Easton Deluxe 33" & 36" arrow cases
- Case-cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter for maximum contents protection
- Airline travel cover recommended (sold separately)
- Color: black/orange



ROLLER BOWCASE TRAVEL COVERS

- Fits Deluxe 3915 and 3615 Roller Recurve bow cases
- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot
- Water resistant



NEW

ELITE 2.0 4717 DOUBLE BOW CASE

- Accommodates two full-size target bows up to 47" in overall length
- Case-cube compatible double-fleece main compartment
- Double or single bow with opposite side clothing storage
- 360° exterior padding
- Dimensions 47"x17"
- Movable hook-and-loop bow anchor system
- Eight interior and exterior accessory pockets with dedicated separate compartments for quivers, stabilizers, and arrow storage
- Compatible with Easton arrow totes & Deluxe 33" & 36" arrow boxes
- Padded shoulder strap and comfortable carry handle
- Available in black/grey color



WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with Easton Deluxe Hip/Field quivers
- Dense 360 degree exterior/corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: flo-green, teal, red, black, and blue



WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Eight interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: NEW charcoal, Realtree® Edge, teal/grey, olive/grey, Lost®Camo XD, and Realtree® Xtra



NEW



BOW-GO™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- Four interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: NEW black, Realtree® Edge, flo green/grey, teal/grey, olive/grey, and Lost®Camo XD



NEW



Lost Camo XD is a registered trademark of MCP IP LLC.
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.

DELUXE 4517 BOW CASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear
- Compatible with all Easton arrow tote and arrow case models
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior (case cubes sold separately)
- Fits most bows –interior dimensions 44" x 16"
- Movable bow-anchoring straps for rock-solid bow security
- 360° padding for complete bow protection
- Colors: Realtree® Max-1/lavender

 **REALTREE**
Realtree Max1 is a trademark of Jordan Outdoor Enterprises, Ltd.



MICRO FLATLINE™ 3618

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors: flo-green/blue, pink/yellow, black/grey, grey/red, Realtree® Edge, and Lost® Camo XD

 **REALTREE** **LOSTCAMO/XD**
*Lost Camo XD is a registered trademark of MCP IP LLC.
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.*



GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Blue, Lost® Camo, Pink, and Black

LOSTCAMO
Lost Camo is a registered trademark of MCP IP LLC.



BOWSLICKER™

- Easy, secure carry with patented limb loop design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axle-to-axle
- Color: Olive Green

 **ALPINE INNOVATIONS**
Officially Licensed Product
Protected by US Patents:
9,038,878 & 9,310,158



X10 Spine Tee



Diamond E 2020 Tee



AXIS Spine Tee



FMJ Spine Tee



FMJ Flag Tee



Archery 2019 Tee



Antler E Zip Hoodie



Camo Windbreaker



Diamond E Hoodie



FMJ Camo Hoodie



Target Socks



Skull Socks



NEW Legacy Diamond • FMJ Camo • Easton Shooter • Antler E Legacy Waxed
(Men's & Women's)



Arm Sleeve

PACKS

CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with great features
- High-denier fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: teal, flo-green, grey, blue, red, and black



DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks

CASE CUBES™ BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all Easton bowcases



STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases



DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
 - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 - Round Arrow Tote (12-arrow) - adjustable length



CROSSBOW

CROSS-GO™ 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Overall dimensions 41" long x 26" wide
- 360° padded soft sided case with 3 interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton crossbow arrow case
- Colors: Olive/Grey



DELUXE 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe molded crossbow arrow case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Compatible with both standard and reverse limb crossbows
- Includes one corner case cube pocket
- Inside dimensions 41" x 26"
- Color: Black/Orange



CROSSBOW SLICKER™

- Fits crossbows from 15" to 30" axle-to-axle
- Rugged, weatherproof fabric
- Ultra-light—weighs less than 8 oz
- Color: Olive Green



Officially Licensed Product
Protected by US Patents:
9,038,878 & 9,310,158



BEGINNER ARCHERY

VECTOR™ CARBON ARROWS

- Ideal for beginners looking for higher performance
- Durable wrapped carbon construction
- Nocks and 65-grain points installed—ready to shoot
- Shield-feather fletch
- Available in 1000 and 1400 spine sizes
- Available in 4-pack or 72-count case
- 28" length



ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high-strength 28" arrows
- Finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: black and pink



XX75™

- 7075 aerospace alloy
- Guaranteed straightness: ±.005
- Weight tolerance: ±2.5%
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock
- Pre-cut to 28" with point installed



SCOUT 2™

- Durable fiberglass construction
- Over nock – installed
- Sleeve point – installed
- 26" or 28"




BEGINNER BOW

The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard



Kit colors: black, pink, and Realtree Xtra®



Realtree and Realtree Xtra are registered trademarks of Jordan Outdoor Enterprises, Ltd.

BEGINNER FINGER TAB

- For right handed archers



POINTS, NOCKS, AND INSERTS

POINTS



HP™ Point (6MM)
Fits H (6MM) diameter arrows
Point Weight – 80 & 100 Grains



CB™ Point (6.5MM)
Fits S (6.5MM) diameter arrows
Point Weight – 80 & 100 Grains

THREADED POINTS



RPS™ Screw-in Point — Nickel-plated Hardened Steel
17/64" – 50, 60, 70, 80, 90, 100, 110 grains
9/32" – 50, 60, 70, 80, 90, 100, 110 grains




Multi Point™
17/64" – 75, 85, 100 grains
9/32" – 75, 85, 100 grains
5/16" – 85, 100, 125 grains
11/32" – 85, 100, 125 grains



Deep Six™ Field Points
Fits G (4MM) & X (5MM) arrows with Deep Six thread inserts
100 & 125 Grains

INSERTS



Deep Six™ Steel G (4MM) HIT Insert
Fits G (4MM) diameter Carbon, A/C & FMJ Injection arrows
Uses Deep Six thread points
20 Grains



Deep Six™ Steel X (5MM) RPS® Insert
Fits X (5MM) diameter FMJ, AXIS & Deep Six XD arrows
Uses Deep Six thread points
25 Grains

INSERTS *CONTINUED*



RPS™ Insert



Brass X (5MM) HIT® Break-Off Insert
75 – 50 Grains



X (5MM) HIT® Insert
16 grains
Dozen Pack and 100 count Bulk



6MM RPS Insert
18 grains



H (6MM) Brass Insert
75 – 50 grains



MicroLite™ H (6MM) Insert
9 Grains



CB™ (6.5MM) Insert
21 grains



MicroLite™ S (6.5MM) Insert
9 grains Dozen Pack



6.5MM™ Insert
23 grains



T64™ RPS Insert
(18 grains)



Half-Outs
Titanium (55 grains), Aluminum (35 grains)

INSERTS *CONTINUED*



5MM Aluminum 8-32 Half-out
(25 grains)



5MM Steel 8-32 Half-out
(75 grains)

BOLT INSERTS



Aluminum
40 Grains



FMJ™ Brass
(120 Grains)



Brass
100 Grains



9MM Crossbow Insert
61 Grains

UNI BUSHINGS



G-UNI™ (4MM)



X-UNI™ (5MM)
Fits 6MM



Super UNI Bushing®

INDEXABLE NOCKS



G Nock™ Precision-molded, Press-fit (4MM)
Colors: black, white, green, orange, deep red
Throat: Small=0.096, Large= 0.112
Dozen Pack and 100-count Bulk
(6 grains)



H Nock™ (6MM)
Colors: black, white, blue, yellow, green, orange, deep red, pink
Throat: 0.111
Dozen Pack and 100-count Bulk
(9 grains)



MicroLite™ Super Nock® (6.5MM)
Colors: blaze, emerald, yellow, red, smoke
Throat: 0.108
Dozen Pack and 100-count Bulk
(8 grains)



Deep Six™ Nock (4MM)
Colors: deep red, green, lemon-lime and blue
Throat: 0.112
Dozen Pack and 100-count Bulk
(6 grains)



Super Nock® & S Nock™ (6.5MM)
Colors: orange, green, yellow, black, white, pink
Throat: 0.108
Dozen Pack and 100-count Bulk
(13 grains)



X Nock™ (5MM)
Colors: black, white, yellow, green, orange, blue, smoke
Throat: 0.111
Dozen Pack and 100-count Bulk
(9 grains)



3D Super Nock®, (6.5MM)
Colors: black, green, orange, white, crystal, lemon-lime, purple, red, and smoke
Throat: 0.103
Dozen Pack and 100-count Bulk
(13 grains)

CONVENTIONAL NOCKS



Conventional Nock—Swaged Shafts
Colors: black, green, orange, white, blue, red
Dozen Pack and 100-count Bulk

CROSSBOW NOCKS



Talon™
Colors: red
Six Pack
(12 grains)



Halfmoon & Flatback Nocks
Colors: red, orange, green
Dozen Pack and 100-count Bulk
Flatback (9 grains) Half Moon (11 grains)



BROADHEAD ADAPTER RING (BAR)



(See arrow model pages for fitment) Use the BAR when required by broadhead design — fixed broadheads that utilize the face of the insert to support or hold the blades in place and mechanical broadheads that use the insert as a stop for the blades after opening require BAR's.

Dozen Clamshell Pack

FEATURES

For use with carbon and A/C micro diameter arrows
Provides superior broadhead alignment
Protects shafts from hard impacts and blade expansion

V3™ EXPANDABLE VARMINT POINT

FEATURES

Expandable action	Helps prevent lost arrows
Flies exactly like field points	Replaceable blades
Conventional thread or Deep Six	100 grains
	Patent pending



V3 – 8-32 Thread



V3 – Deep Six Thread

FMJ AND CARBON ARROW SIZE SELECTION

COMPOUND BOW <small>BOW RATING TO 301-340 FPS</small>	YOUR ARROW LENGTH										RECURVE	Longbow
	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	BOW POUNDAGE	
BOW POUNDAGE												
22-26				700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460		38-43
27-31			700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5		44-49
32-36		700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	32-36	50-55
37-41	700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	37-41	56-61
42-46	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	42-46	62-67
47-51	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF 7.9	340, 330, 320, 300, DF7.9	47-51	68-73
52-56	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF 7.9	330, 320, 300, DF7.9	52-56	74-79
57-61	600	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF 7.9	300, 280, 260, 250, 240	57-61	80-85
62-66	500, 480, 460, 470	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240	62-66	
67-72	500, 480, 470, 460	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240		67-72	
73-78	400, 390, DF9.5	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240			73-78	
79-84	400, 390, DF9.5	400, 390, DF9.5	340, 330, 320, DF7.9	340, 330, 320, 300, DF7.9	330, 320, 300, DF7.9	300, 280, 260, 250, 240	260, 250, 240					
Note: For fractional arrow lengths, round up or down to the closest column. Examples, if arrow length is 28.25" round down to the 28" column. If arrow length is 28.5" round up to the 29" column.												

ADJUSTING THE CHART TO YOUR BOW SET-UP

The Hunting Chart is based on a Bow Speed Rating of 301-340 FPS and 100-grain points. If your set-up is different, make the following adjustments to your bow weight.

Bow Speed Ratings:	
Up to 300 FPS	subtract 5 lbs of bow weight
301-340 FPS	no adjustment
341-350	add 5 lbs of bow weight
351 FPS or Higher	add 10 lbs of bow weight

HUNTING ARROW SELECTION

COMPOUND BOW

- Determine your correct arrow length per diagram on next page.
- Determine correct peak bow weight (not holding weight) and draw length with the assistance of a qualified archery pro shop.
- Determine the ATA (Archery Trade Association) rating velocity of your bow.
- Factor variables to the “standard compound setup” to determine CALCULATED bow weight. For compounds the “standard setup” includes use of a release aid and a brace height greater than 6.5”. Deviations for the standard compound setup require factoring in EACH VARIABLE as follows:

A. Brace height lower than 6.5”- add 5 lbs to CALCULATED bow weight.

B. Finger release- add 5 lbs to CALCULATED bow weight.

Add the total of actual PEAK bow weight and all CALCULATED bow weight adjustments to determine final calculated weight. For example, with a 60 lb peak bow with a 6” brace height, calculated bow weight will be 60+5 for a calculated 65 lb bow weight. Now, in the “Calculated Peak Bow Weight” chart, select the column under the

Point Weights:	
75 grains	subtract 3 lbs of bow weight
100 grains	no adjustment
125 grains	add 3 lbs of bow weight
150 grains	add 6 lbs of bow weight



ATA range for your specific bow and your point weight. Follow the column down to your CALCULATED bow weight. Then, follow the chart to the right until you reach the column with your correct arrow length, and note the group letter (A-M). This letter will represent the suggested arrow group for your selection.

RECURVE OR Longbow (Finger Release)

It is critical that the correct bow weight be used when determining the weight column to be used on the chart. Actual peak bow weight should be measured at your correct draw length. Easton recommends the use of a dedicated bow scale or the assistance of a qualified pro shop for this purpose. Use the Recurve or Longbow ACTUAL weight chart on the right side of the chart to select the column corresponding to your bow type and point weight. Follow the column down to your bow weight and then follow the row to the left to find your suggested arrow group.

The Shaft Size listing below each group letter represents your suggested arrow shaft size. Note that providing incorrect weight or length information, or incorrect variable calculation, may result in an incorrect shaft size selection.

DETERMINING ARROW LENGTH

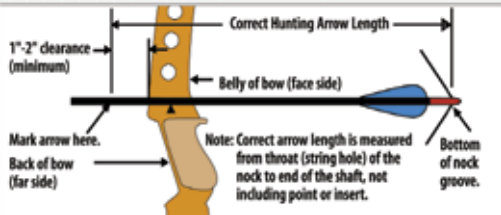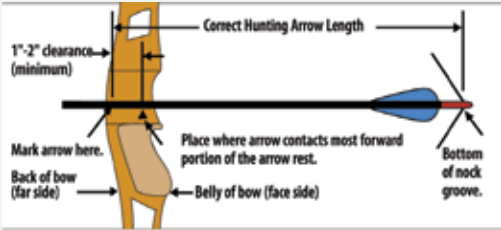

Every effort has been made to ensure the accuracy of this Product Guide. Graphics and images are for illustration purposes only. Due to our effort to continually improve our products, Easton reserves the right to make changes without notice.

SIZES BY MODEL

FMJ & A/C	700	600	500	480	470	460	400	390	380	340	330	320	300	280	260	250	240
4-6MM T64 FMJ™	DF 7.4, 9.5																
4MM FMJ™						●	●				●			●			
4MM A/C PROCOMP™									●	●			●			●	
5MM FMJ™ & MATCHGRADE			●				●			●			●			●	
5MM FMJ DANGEROUS GAME™												●				●	
6MM FMJ™					●			●				●					
ALL CARBON	700	600	500	480	470	460	400	390	380	340	330	320	300	280	260	250	240
4MM CARBON INJEXION™				●			●				●			●			
5MM AXIS®	●	●	●				●			●			●		●		
5MM AXIS SPT®	●	●	●														
5MM AXIS MATCH GRADE®							●			●			●		●		
5MM AXIS® TRADITIONAL		●	●				●			●							
6MM BLOODLINE™				●			●				●						●
6MM HEXX™			●				●			●					●		
6MM AFTERMATH™		●	●				●			●			●				
6.5MM HYPERSPEED™			●				●			●			●				
6.5MM MATCH GRADE™			●				●			●			●				
6.5MM HUNTER CLASSIC™			●				●			●			●				
6.5MM BOWHUNTER™			●				●			●							
DEFENDER™			●				●			●			●				
CENTERSHOT™		●	●				●			●							
WHITEOUT™			●				●			●			●				

For complete arrow selection visit eastonarchery.com or visit a qualified pro shop to assist in bow tuning and correct arrow size selection.

Easton's selection charts are regularly updated to reflect the latest in bow performance. We continue to make adjustments to size recommendations based on increased bow efficiencies and more aggressive cam profile developments. Please read over the chart and all guidelines before selecting arrow shafts based on prior experience.

ALUMINUM ARROW SIZE SELECTION

COMPOUND BOW <small>BOW RATING TO 301-340 FPS</small>	YOUR ARROW LENGTH										RECURVE	LONGBOW
	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"		
BOW POUNDAGE											BOW POUNDAGE	
22-26				1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114		38-43
27-31			1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213		44-49
32-36		1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	32-36	50-55
37-41	1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	37-41	56-61
42-46	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	42-46	62-67
47-51	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	47-51	68-73
52-56	1916, 2013	500, 2013, 2016	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317	52-56	74-79
57-61	500, 2013, 2016	500, 2016	500, 2018, 2114,	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317		57-61	80-85
62-66	500, 2016	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317			62-66	85-91
67-72	500, 2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317				67-72	92-97
73-78	400, 2117, 2213	400, 2117, 2215, 2216, 2314	400, 2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317					73-78	98-103
79-84	400, 2117, 2215, 2216, 2314	400, 2119, 2216, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317							
Note: For fractional arrow lengths, round up or down to the closest column. Examples, if arrow length is 28.25" round down to the 28" column. If arrow length is 28.5" round up to the 29" column.												

ADJUSTING THE CHART TO YOUR BOW SET-UP

The Hunting Chart is based on a Bow Speed Rating of 301-340 FPS and 100-grain points. If your set-up is different, make the following adjustments to your bow weight.

Bow Speed Ratings:		Point Weights:	
Up to 300 FPS	subtract 5 lbs of bow weight	75 grains	subtract 3 lbs of bow weight
301-340 FPS	no adjustment	100 grains	no adjustment
341-350	add 5 lbs of bow weight	125 grains	add 3 lbs of bow weight
351 FPS or Higher	add 10 lbs of bow weight	150 grains	add 6 lbs of bow weight

SIZES BY MODEL

ALUMINUM	300	340	400	500	1816	1916	2013	2016	2018	2114	2117	2213	2215	2216	2219	2314	2315	2317	2413
GAMEGETTER™	●	●	●	●															
LEGACY™						●		●	●		●			●	●				
CAMO HUNTER™					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

For complete arrow selection visit eastonarchery.com or visit a qualified pro shop to assist in bow tuning and correct arrow size selection.

SHAFT MODELS

FMJ & A/C	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
4-6MM T64 FMJ™	Precision 7075 alloy jacket bonded to a carbon core	T64 RPS	8-32 Multipoint	Internal-fit	4MM Deep Six™	±2 grains	± 3 Miliradians	Two tone Green/Silver	DF 7.9, DF 9.5
4MM AC PROCOMP™	High-strength carbon fiber bonded to a 7075 core	Aluminum, Titanium Half-out	8-32 Multipoint	Internal-fit	4MM Deep Six™	±0.5 grains	±.0015"	Polished black carbon	380, 340, 300, 250
4MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	Deep Six HIT® Insert 8-32 HO	Deep Six	Internal-fit	4MM Deep Six™	±2 grains	±.002"	Carbon, Diamond Pattern	460, 400, 330, 280
5MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	HIT® Insert or Deep Six RPS 8-32 HO	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.002"	Diamond Pattern	500, 400, 340, 300, 250
5MM FMJ MATCH GRADE™	Precision 7075 alloy jacket bonded to a carbon core	HIT® Insert or Deep Six RPS 8-32 HO	RPS or Deep Six	internal-fit	5MM X™	±2 grains	±.001"	Carbon, Diamond Pattern	500, 400, 340, 300
6MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	ST RPS Insert 6MM RPS	RPS	Internal-fit	6MM H™	±2 grains	±.003"	Two-Tone Gunmetal/ Silver	470, 390, 320
4MM FMJ DANGEROUS GAME™	Precision 7075 alloy jacket bonded to a carbon core	Brass HIT® Insert or Deep Six RPS 8-32 HO	RPS or Deep Six	Internal-fit	5MM X™	±5 grains	±.002" g	Black, Diamond Pattern	300, 250

ALL CARBON	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
4MM CARBON INJEXION™	High-strength carbon construction fibers	Deep Six HIT® Insert 8-32 HO	Deep Six Point	Internal-fit	4MM Deep Six™	±0.5 grain	±.003"	Black, Micro-smooth	480, 400, 330, 280
5MM AXIS™	High-strength carbon-composite fibers	HIT® Insert 8-32 HO	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.003"	Black, Micro-smooth	700, 600, 500, 400, 340, 300, 260
5MM AXIS SPT™	High-strength carbon-composite fibers	HIT® Insert or Brass HIT® Insert /8-32 HO	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.006"	Black, Micro-smooth	700, 600, 500
5MM AXIS MATCH GRADE™	High-strength carbon-composite fibers	HIT® Insert or Brass HIT® Insert /8-32 HO	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.001"	Black, Micro-smooth	400, 340, 300, 260
5MM AXIS™ TRADITIONAL	High-strength carbon-composite fibers	HIT® Insert or Brass HIT® Insert / 8-32 HO	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.003"	Woodgrain Graphic	600, 500, 400, 340
6MM BLOODLINE™	High-strength carbon-composite fibers	HP Insert 6MM RPS	HP or RPS	Internal-fit	6MM H™	±2 grains	±.003"	Black, Micro-smooth	480, 400, 330, 240
6MM HEXX™	UltraLite carbon composite fibers	MicroLite H Insert	HP or RPS	Internal-fit	6MM H™	±1 grain	±.001"	Black, Micro-smooth	480, 400, 330, 260
6MM AFTERMATH™	High-strength carbon-composite fibers	ST RPS Insert 6MM RPS	HP or RPS	Internal-fit	6MM H™	±2 grains	±.005"	Black, Micro-smooth	600, 500, 400, 340, 300
EASTON 6.5MM MATCH GRADE™	High-strength carbon-composite fibers	CB Insert 6.5MM Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.001"	Black, Micro-smooth	500, 400, 340, 300
EASTON 6.5MM HUNTER CLASSIC™	High-strength carbon-composite fibers	CB Insert 6.5MM Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.003"	Black, Micro-smooth	500, 400, 340, 300
EASTON 6.5MM BOWHUNTER™	High-strength carbon-composite fibers	CB Insert 6.5MM Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.006"	Black, Micro-smooth	500, 400, 340
6.5MM HYPERSPEED PRO™	UltraLite carbon composite fibers	CB Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.001"	Black, Micro-smooth	500, 400, 340, 300
6.5MM HYPERSPEED™	UltraLite carbon composite fibers	CB Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.003"	Black, Micro-smooth	500, 400, 340, 300
6.5MM DEFENDER™	High-strength carbon-composite fibers	CB Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.004"	Black, Micro-smooth	500, 400, 340, 300
6.5MM DEFENDER ELITE™	High-strength carbon-composite fibers	CB Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.002"	Black, Micro-smooth	400, 340, 300
6.5MM CENTERSHOT™	High-strength carbon-composite fibers	CB Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.003"	Wood Grain Carbon	600, 500, 400, 340
6.5MM WHITEOUT™	High-strength carbon-composite fibers	CB Insert	CB or RPS	Internal-fit	6.5MM	±2 grains	±.003"	White, Realtree®	500, 400, 340, 300
6.5MM WHITEBOX™	High-strength carbon-composite fibers	CB Insert	CB or RPS	Internal-fit	6.5MM	NA	NA	Black, Micro-smooth	One Size

ALUMINUM	Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
CAMO HUNTER™	7075-T9	96,000	RPS Insert	One-piece Bullet	Super UNI System or X (UNI System	Super, 3D Super, X or MicroLite™	±1%	±.002"	4-Tone Black, Brown, Dark Green, & Light Green Dye Camo	1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413
LEGACY™	7075-T9	95,000	RPS Insert	One-piece Bullet	Full-diameter Taper Swage	Conventional	±1%	±.002"	Cedar-Grain, PermaGraphic	1916, 2016, 2018, 2117, 2216, 2219
GAMEGETTER™	7075-T9	96,000	RPS Insert	One-piece Bullet	Super UNI System Composite Bushing	Super or 3D Super	±1¼%	±.003"	Black, Hard-anodized	500, 400, 340, 300
FIBERGLASS	Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
SCOUT 2™	Fiberglass	Not Available	Not Available	Steel Sleeve	Open-ended slip-on	Over Nock	N/A	N/A	Orange	17/64"

CROSSBOW

FULL METAL JACKET	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
FMJ™	Precision 7075 alloy jacket bonded to a carbon core		HP Bolt Insert	RPS Point	Internal-fit	Halfmoon Flatback	±.2 grains	±.003"	Black, Diamond Pattern	20, 22
CARBON	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ²	Color/Finish	Sizes
BLOODLINE™	SuperLite Carbon multi-layer wrapped fibers		HP Bolt Insert	RPS Point	Internal-fit	Talon™ Halfmoon Flatback	±.2 grains	±.003"	Black, Micro-smooth	20, 22
EASTON 9MM™	SuperLite Carbon multi-layer wrapped fibers		9MM Bolt Insert	RPS Point	Internal-fit	Halfmoon	±.2 grains	±.003"	Black, Micro-smooth	20, 22
ALUMINUM	Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance	Straightness ¹	Color/Finish	Sizes
MAGNUM XX75™	7075-T9	96,000	RPS Insert	RPS Point	Internal-fit	Talon™ Halfmoon Flatback	±.2 grains	±.003"	Gray Anodize	20, 22
1 Guaranteed straight to more stringent standards than ATA/ ASTM methods. 2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.					3 Tensile strength value may vary ±3%. 4 Grains-per-shafts in a dozen bundle. ®/™ Registered trademark/trademark of Easton.			Lost® Camo is a registered trademark of MCP IP LLC. Realtree™ is a registered trademark of Jordan Outdoors. Under Armour® is a registered trademark.		

ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size ^{1,10}	Shaft Weight XX75 ¹	Spine @28" Span	Stock Length ² XX75 ¹	Conventional Nock Size ³	UNI System ⁵			One-piece Bullet Point	RPS® Insert Alum.	RPS® Point Size
					UNI Bushing ²	X Nock Bushing	Super UNI Bushing ⁶			
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains	Grains	Grains	Grains ⁷	Grains ⁷	Inches
1816	9.3	0.756	30	⅜32	8	4	—	74	12	⅜32
1916	10.0	0.623	31	⅜32	9	7	—	82	16	⅜16
2013	9.0	0.610	32	⅜16	—	—	5	—	21	⅜16
2016 (500)	10.6	0.531	32	⅜16	—	—	4 ^{8,10}	90	20	⅜16
2018	12.3	0.464	30 ½	⅜16	—	—	4	—	19	⅜16
2114	9.9	0.510	31	—	(11)	—	7	100	25	⅜16
2117 (400)	12.0	0.407	31 ½	⅜16	—	—	7 ^{8,10}	100	25	⅜16
2213	9.8	0.458	31	—	(13)	—	9	100	30	1⅜32
2215	10.7	0.419	31 ½	—	—	—	9	100	30	1⅜32
2216	12.0	0.376	32	1⅜32	—	—	9	100	29	1⅜32
2219	13.8	0.337	32	1⅜32	—	—	8	—	26	1⅜32
2314	10.7	0.391	32	—	(14)	—	10	100	34	1⅜32
2315 (340)	11.7	0.342	32	—	—	—	11 ^{8,10}	100	37	1⅜32
2317 (300)	13.3	0.297	32	—	—	—	11 ^{8,10}	100	37	1⅜32
2413	10.4	0.365	32	—	(17)	—	12	100	40	1⅜32

- Indicates not available
- 1 XX75 Camo Hunter, GameGetter, Legacy
- 2 Length is approximate stock shaft length for each size.
- 3 Nock size for conventional swaged nock taper.
- 4 UNI—Universal Nock Installation System.
- 5 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory.
- 6 RPS = Replaceable Point System with 8-32 ATA Standard thread.
- 7 All components are ±1 grain.
- 8 Super UNI Bushing accepts Super Nock, 3D Nock, "S" Nock and Microlite Super
- 9 GameGetter composite bushing weight: 300 & 340=9 grains, 400=5 grains, 500=3 grains.
- 10 GameGetter shaft sizes indicated in parentheses.
- Notes: Shaft size 1816 use BAR6; size 1916 uses BAR8 Broadhead

⚠ WARNING! FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE @ www.bsafe.ws or call 877-INFO-ETP (877-463-6387).

BOW INSPECTION

Before shooting any Easton arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Easton arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at www.eastonarchery.com/shaft-selector/). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage. **WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.**

ARROW BREAKAGE

Any arrow can become damaged. A damaged arrow could break upon release and injure you or a bystander. Damage to an arrow shaft, or any of its components, may occur from: improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Before shooting, place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection video at www.eastonarchery.com/warning-use/). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW. If the nock is damaged, REPLACE THE NOCK. WARNING! NEVER SHOOT AN ARROW WITH A DAMAGED NOCK.**

LIMITED WARRANTY

The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see www.eastonhunting.com.

⚠ WARNING: Cancer and Reproductive Harm—www.P65Warnings.ca.gov
Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements.
See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only. It is not a solicitation for product sales.

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel and listen for cracking (*Figure 1*). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged. **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**



2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (*Figure 2*). If the arrow "relaxes" or twists easily, the carbon has been damaged. **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**



A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

CARBON ARROW CUTTING

Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.



ADVANCING ARCHERY'S LEGACY



EASTONARCHERY.COM